


SELECTION CRITERIA

- Fresh water use
- Direct acting
- Actuation by pressure
- Open on pressure increase
- 350 PSI water pressure rating
- NPT end connections (British threads available)
- 2-way configuration
- 3/8" thru 1" sizes
- Manual override
- Optional water pressure rating to 500 PSI

CONSTRUCTION DETAILS

- Brass & Stainless Steel internals
- All O-Ring sealed (Buna-N)
- Brass body

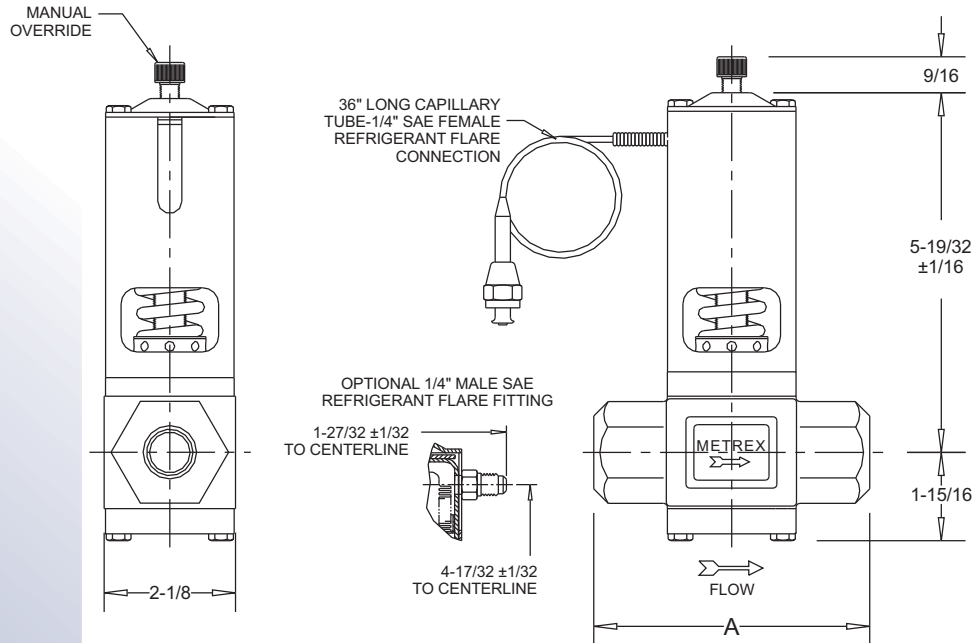

Reference Metrex drawing WCCW-3099

VALVE SIZING CHART & PRESSURE RATING


VALVE PART NUMBER	PIPE SIZE	C_v	A
WCCW-3050	3/8"	2.2	4-3/8
WCCW-3060	1/2"	2.6	4-3/8
WCCW-3070	3/4"	4.5	4-3/8
WCCW-3080	1"	6.0	4-15/16



PRESSURE RATING			
PRESSURE RATING	STANDARD	H	EH
DESIGN PRESSURE	350 PSI	400 PSI	500 PSI
PROOF PRESSURE	525 PSI	600 PSI	750 PSI

ORDERING INFORMATION

- Use the valve sizing chart on the preceding page to determine the complete part number.

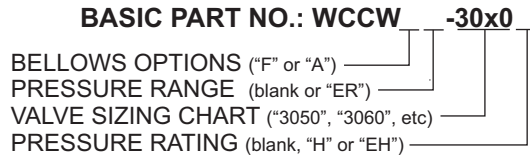

PRESSURE RANGE ADJUSTMENT

- The refrigerant pressure at which the valve begins to open can be adjusted per below. The span is the minimum increase in pressure required to fully open the valve.

VALVE	SET POINT	SPAN
WCCW_	50-225	45
WCCW_ER-	50-260	50

all values PSIG

BELLOWS OPTIONS


- The optional 1/4" male SAE flare fitting for refrigerant pressure connection is designated by an "F" after the WCCW_. The 1/4" SAE flare fitting replaces the 36" long capillary tube connection.

Example: WCCWE-3080

- The optional ammonia actuator includes a steel assembly and is designated by an "A" after the WCCW_.

Example: WCCWA-3060.

FLOW DATA

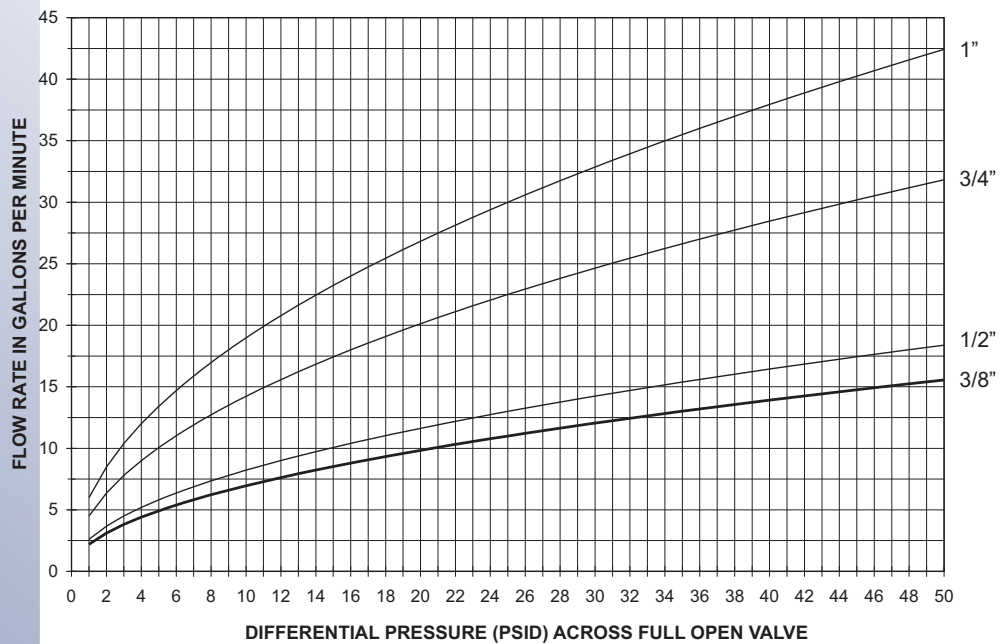

GENERAL DESCRIPTION

- The WCCW series valves are direct acting, modulating water regulating valves utilizing all o-ring construction to accommodate high water pressures up to 500 PSI. A manual flushing/override feature is provided.

INSTALLATION INSTRUCTIONS

- Valves can be mounted in any position without affecting performance. However, for ease of adjustment consider the accessibility of the adjusting screw.
- Connect the incoming water line to the valve inlet. Connect condenser port and bypass port as shown above. Direction of water flow is indicated by the arrow cast on the side of the valve body.
- Connect capillary tube (1/4" flare nut) to refrigerant head pressure connection on condenser.

ADJUSTMENT

- To increase the actuating refrigerant head pressure, insert a pin or hex key into the adjustment nut and turn counter-clockwise. To lower actuating refrigerant head pressure, turn adjustment nut clockwise.

MANUAL OVERRIDE

- To flush the valve through condenser outlet, independent of head pressure setting, insert an allen wrench into the manual flush screw on top of the valve and turn clockwise until the screw bottoms. After flushing, reverse this procedure for automatic operation. **Caution:** If the manual flushing screw is not unscrewed or backed off sufficiently to clear the flush plate, the condenser port will not close.

2-WAY HEAD PRESSURE REGULATOR TYPICAL APPLICATION

- Typically used to modulate the cooling water through a condenser in response to a pressure signal from the condenser. Refrigerant head pressure is maintained over a wide range of operating conditions for a maximum system operating efficiency.

